


**Sceptalight™ LED**

**LVPE-LED | 277122**

Sceptalight LEDs provide exceptional lighting for wet and corrosive environments. They can be used in a variety of commercial and industrial applications where durability and water tightness are required. Sceptalight LEDs have been built from durable materials and tested and certified to the latest luminaire and retrofit standards. Sceptalight LEDs provide over 1575 lumens of light output using only 15W of electricity and are dimmable down to 5%.

**APPLICATION / USE**

Sceptalight LEDs are intended for use with non-metallic conduit systems (PVC), designed and approved for indoor and outdoor applications, NEMA 4X and IP66 rated for wash down and corrosive environments.

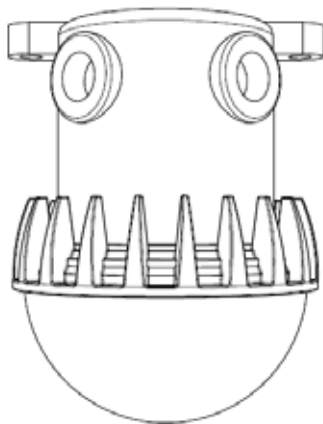

L: 5"  
W: 5"  
H: 6 1/2"

**MATERIAL**

Silicone (Gasket), Aluminum (Heat Sink),  
Globe (Polycarbonate),  
Base (Glass filled Polyester)

**STANDARDS**

CSA 22.2 250.0,  
UL 1598, UL 1598C

**FLAMABILITY RATING**

5VA

**ENVIRONMENT RATING**


NEMA 4X / IP66

**PACKAGING**

LVPE-LED  
Carton Quantity: 6  
Carton Weight: 9.9 lbs/4.5 kg

Lumen Output	1575 lm
Input Voltage	120 VAC
Frequency	60 Hz
Nominal Power	15 W
Color Temperature	5000 K
CRI	> 80
Power Factor	> 0.98
Total Harmonic Distortion	< 10.5%
Operating Temperature	-40°C to 40°C
Dimmability Range	Down to 5%
Rated Life	> 50,000 Hours
* Warranty	5 Years

**PHOTOMETRIC DATA**

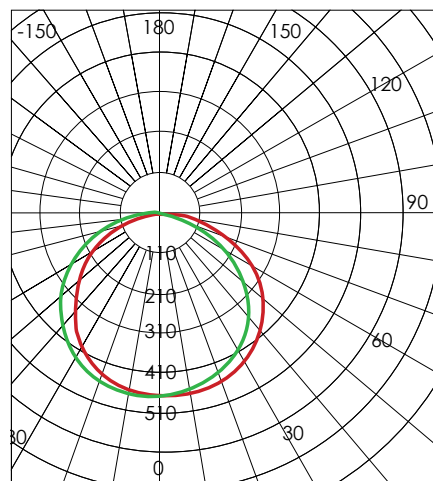

\* LIMITED WARRANTY & LIMITATION OF LIABILITY:

Consult IPEX Sceptalight™ LED Retrofit Light Engine Specific Terms and Conditions of Sale and Limited Warranty and Limitation of Liability for further details, available at ipexna.com.