

PVC PRESSURE PIPING SYSTEMS FOR WATER TRANSMISSION



IPEX CENTURION®



MUNICIPAL SYSTEMS

PVC PRESSURE PIPING SYSTEM MANUFACTURED
TO AWWA & CSA STANDARDS

- IPEX Centurion® 14" – 60" (350mm – 1,500mm),
AWWA C900 and CSA Standards



We build tough products for tough environments®

IPEX CENTURION®

14" – 60" (350mm – 1,500mm)

UNMATCHED VERSATILITY & EASE OF INSTALLATION

IPEX Centurion® extends the benefits of Blue Brute to larger diameters of pipe and new applications. The versatility and ease of installation of IPEX Centurion is unmatched – and costly and difficult to install corrosion protection is eliminated. In addition, unlike HDPE or concrete pressure pipe, every length of IPEX Centurion is tested to twice its Pressure Class/Rating.

CORROSION RESISTANT PERFORMANCE

IPEX Centurion systems are resistant to corrosion from aggressive soils and galvanic action.

BOTTLE-TIGHT JOINTS, REMOVABLE GASKETS

IPEX's patented gasket system not only withstands many times the rated system pressure, but also withstands full vacuum pressures. The unique removable gasket system allows special oil-resistant (nitrile) gaskets to be easily installed when working in contaminated soils.

THIRD-PARTY CERTIFICATION


All IPEX municipal systems are third-party certified as applicable. In addition, IPEX Centurion and Blue Brute systems have Factory Mutual approval and Underwriter's Laboratories (ULI and ULC) listings.

SUPERIOR HYDRAULICS

The glass-like finish of PVC reduces friction losses and eliminates the tuberculation common in iron pipes. As a result, pumping costs are reduced and water quality is maintained.

CAST IRON OUTSIDE DIAMETER (CIOD)

IPEX Centurion systems are manufactured with a cast iron outside diameter (CIOD). This is compatible with waterworks valves, appurtenances and restrainers.

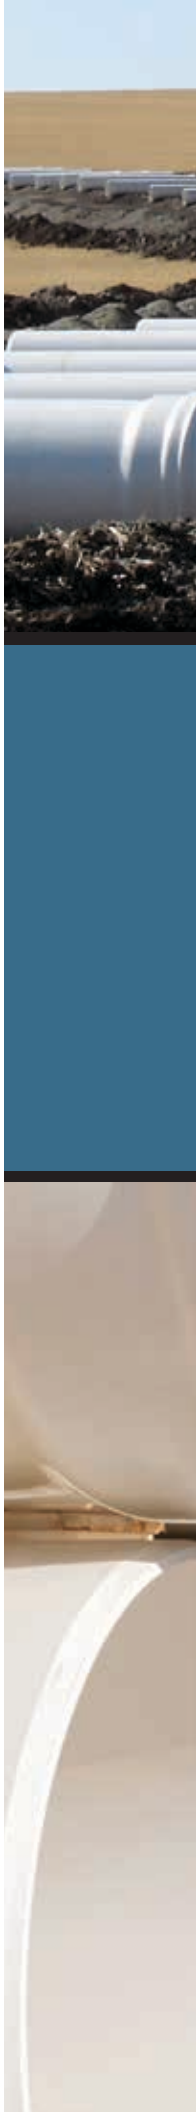



EVERY DAY CONSTRUCTION PROJECTS ARE BREAKING GROUND IN SOME OF THE WORLD'S TOUGHEST AND MOST DEMANDING ENVIRONMENTS. CHANCES ARE THAT IPEX BRAND PRODUCTS AND PEOPLE ARE THERE.

Building on this strength is IPEX's dedication to product and service innovation – driven by customer needs. As one of the first to pioneer PVC pipe in North America, our commitment to innovation has led to many industry firsts. IPEX companies continually introduce new or enhanced products that are easier to work with, are longer lasting and deliver greater value to the customer.





IPEX Centurion pipe can withstand the **pressure**

IPEX CENTURION 1500MM (60") DR-51 C100 POTABLE WATER PIPE SYSTEMS

PRESSURE CLASSES / PRESSURE RATINGS

Water distribution systems normally consist of smaller diameter Blue Brute or Bionax pipe 4" – 12" (100mm – 300mm), where our water transmission systems consist of 14" – 60" (350mm – 1,500mm) Centurion pipe.

C100 pipes in all these size ranges are referred to as having a Pressure Class by AWWA C900, and a Pressure Rating by CSA B137.3. Both standards include a 2:1 safety factor for pressure.

AWWA Pressure Classes CSA Pressure Ratings

Dimension Ratio	PSI	kPa
14	305	2,130
18	235	1,620
25	165	1,150
32.5	125	860
41	100	690
51	80	550

IPEX Centurion is a natural choice for gravity flow lines

GRAVITY APPLICATIONS

With its pressure rated joints and non-corroding construction, IPEX Centurion is a natural choice for gravity flow lines. When designing any flexible conduit application, the ring deflection should be calculated for the applicable loading conditions. The following table shows the ring deflections for different DRs based on depth of bury and H2O loading. For more information on how to calculate ring deflections for PVC pipe, please refer to the IPEX Technical Manual Volume II: Sewer Piping Systems Design.

ASTM Embedment Material Classification	Density (Proctor) AASHTO T-99	E' psi (kPa)	DR	ft m	Depth of Cover														
					1	2	4	6	8	10	15	20	25	30	35	40	45	50	
					0.3	0.6	1.2	1.8	2.4	3.0	4.6	6.1	7.6	9.1	10.7	12.2	13.7	15.2	
Manufactured Granular Angular	Class I	90%	3,000 (20 700)	51	n/r	0.5	0.3	0.4	0.4	0.5	0.7	0.9	1.1	1.4	1.6	1.8	2.0	2.3	
				41	n/r	0.5	0.3	0.4	0.4	0.4	0.4	0.7	0.9	1.1	1.3	1.6	1.8	2.0	2.2
				32.5	0.7	0.5	0.3	0.3	0.4	0.4	0.7	0.9	1.1	1.3	1.5	1.7	2.0	2.2	
				25	0.7	0.5	0.3	0.3	0.4	0.4	0.6	0.8	1.0	1.2	1.4	1.6	1.9	2.1	
Clean Sand & Gravel	Class II	90%	2,000 (13 000)	51	n/r	0.7	0.5	0.5	0.6	0.7	1.0	1.3	1.7	2.0	2.3	2.7	3.0	3.4	
				41	n/r	0.7	0.5	0.5	0.6	0.7	1.0	1.3	1.7	2.0	2.3	2.6	3.0	3.3	
				32.5	1.0	0.7	0.5	0.5	0.5	0.6	1.0	1.3	1.6	1.9	2.2	2.6	2.9	3.2	
				25	1.0	0.7	0.4	0.5	0.5	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7	2.9	
	Class II	80%	1,000 (7 000)	51	n/r	1.5	1.0	1.1	1.1	1.3	2.0	2.6	3.3	4.0	4.6	5.3	5.9	6.6	
				41	n/r	1.4	1.0	1.0	1.1	1.3	1.9	2.6	3.2	3.8	4.5	5.1	5.8	6.4	
				32.5	2.0	1.3	0.9	1.0	1.0	1.2	1.8	2.4	3.0	3.6	4.2	4.8	5.4	6.0	
				25	1.7	1.1	0.8	0.8	0.9	1.0	1.6	2.1	2.6	3.1	3.6	4.2	4.7	5.2	
Sand & Gravel with Fines	Class III	90%	1,000 (7 000)	51	n/r	1.5	1.0	1.1	1.1	1.3	2.0	2.6	3.3	4.0	4.6	5.3	5.9	6.6	
				41	n/r	1.4	1.0	1.0	1.1	1.3	1.9	2.6	3.2	3.8	4.5	5.1	5.8	6.4	
				32.5	2.0	1.3	0.9	1.0	1.0	1.2	1.8	2.4	3.0	3.6	4.2	4.8	5.4	6.0	
				25	1.7	1.1	0.8	0.8	0.9	1.0	1.6	2.1	2.6	3.1	3.6	4.2	4.7	5.2	
	Class III	85%	500 (3 500)	51	n/r	n/r	1.9	2.0	2.2	2.6	3.8	5.1	6.4	7.7	8.9	10.2	11.5	12.8	
				41	n/r	n/r	1.8	1.9	2.1	2.4	3.6	4.8	6.0	7.2	8.4	9.6	10.8	12.0	
				32.5	n/r	2.4	1.6	1.7	1.8	2.1	3.2	4.3	5.3	6.4	7.5	8.5	9.6	10.7	
				25	n/r	1.9	1.3	1.3	1.4	1.7	2.5	3.3	4.2	5.0	5.9	6.7	7.5	8.4	
Silt & Clay	Class IV	85%	400 (2 760)	51	n/r	n/r	2.4	2.5	2.7	3.1	4.7	6.3	7.9	9.4	11.0	12.6	14.1	15.7	
				41	n/r	n/r	2.2	2.3	2.5	2.9	4.4	5.8	7.3	8.8	10.2	11.7	13.1	14.6	
				32.5	n/r	2.8	1.9	2.0	2.2	2.5	3.8	5.1	6.3	7.6	8.9	10.1	11.4	12.7	
	Class IV	85%	400 (2 760)	25	n/r	2.1	1.4	1.5	1.6	1.9	2.9	3.8	4.8	5.7	6.7	7.6	8.6	9.5	

- Deflection values shown include effect of H2O live load and dead load.
- External loading based upon a prism load of soil weight of 120 lbs. per cubic foot (1,900 kg/m³).
- Bedding classifications correspond to ASTM D2321.
- The deflection lag factor is 1.0 for a prism load.
- DR18 & DR 14 deflections have not been shown because they are insignificant in most cases.
- Recommended maximum deflection is 7.5%. Contact IPEX for applications where greater deflections are anticipated.
- n/r – not recommended for H2O live load (ok with dead load)

SURGE PRESSURES

Transient pressures in pipelines occur as a result of the fluid velocity changing over a relatively short time. However it should be noted that for most large diameter pipelines, a formal transient analysis should be carried out by a qualified person in order to fully understand the effects of transients in any given system.

The table on the side shows the surge pressure generated assuming an instantaneous stoppage of a flow moving at 0.3 m/s (1 ft/s).

DR	Surge Pressure	
	psi	kPa
51	10.8	74
41	11.4	79
32.5	12.8	88
25	14.7	101
18	17.4	120
14	19.8	137

SAMPLE SPECIFICATION

General

Pipe must conform to AWWA C900 and be certified to CSA B137.3 "Rigid Polyvinyl Chloride (PVC) Pipe for Pressure Applications." Pressure Class or Rating of pipe shall be as assigned in the AWWA and CSA standards and all be derived using a Hydrostatic Design Stress of 2,000 psi (13.8 MPa). For pressure applications, each length of pipe must be hydrotested at twice the rating and a short-term pressure test must be conducted once per production run. Pipe to be IPEX Centurion or approved equal.

Fabricated Fittings

Fabricated fittings shall be made from segments of AWWA C900 pipe that are butt-fused or bonded together. Some fittings are over-wrapped with fiberglass-reinforced polyester. The fittings must always meet the pressure/class rating of the pipe system.

Deflecting the Joint

The procedure for offsetting the IPEX gasketed joint is shown below.

1. Make a concentric assembly, but push the spigot into the bell only to a point about 1/2 inch (13mm) short of the reference line (the first reference line if there are two). This incomplete assembly permits more movement of the end of the pipe at the bottom of the bell.
2. Without delay, shift the loose bell end of the assembled length by not more than the following recommended maximum offsets. Use only manual effort.

MAXIMUM RECOMMENDED OFFSETS, TO ACHIEVE MINIMUM CURVE RADIUS BY DEFLECTING A STRAIGHT LENGTH OF PIPE AT THE JOINT (FOR ALL PRODUCTS)

Pipe Size		Max Offset		Angle at One Bell	Resulting Radius of Curvature Using 20ft (6m) Lengths	
in	mm	in	mm		ft	m
14 - 60	350 - 1,500	4	100	1.0°	1,146	349
Fabricated PVC Fittings (all sizes)		4	100	1.0°*	1,146	349

* Bell-by-Bell fittings such as tees and couplings offer a total of 2° deflection per fitting.

Standards



AWWA
C900



CSA
B137.3



NQ
3624-250



NSF 61



FM 1612
DR 18 is FM
approved to 24"
(600mm)



UL 1285
DR 18 is listed to 24"
(600mm)
DR 25 is listed to 30"
(750mm)



SALES AND CUSTOMER SERVICE

IPEX Inc.

Toll Free: (866) 473-9462 (IPEX INC)

ipexna.com

About the IPEX Group of Companies

As leading suppliers of thermoplastic piping systems, the IPEX Group of Companies provides our customers with some of the world's largest and most comprehensive product lines. All IPEX products are backed by more than 50 years of experience. With state-of-the-art manufacturing facilities and distribution centers across North America, we have established a reputation for product innovation, quality, end-user focus and performance.

Markets served by IPEX group products are:

- Municipal pressure and gravity piping systems
- Plumbing and mechanical piping systems
- PE Electrofusion systems for gas and water
- Industrial process piping systems
- Electrical systems
- Telecommunications and utility piping systems
- Irrigation systems
- Industrial, plumbing and electrical cements

IPEX Centurion® is manufactured by IPEX Inc.
IPEX Centurion® is a trademark of IPEX Branding Inc.

This literature is published in good faith and is believed to be reliable. However, it does not represent and/or warrant in any manner the information and suggestions contained in this brochure. Data presented is the result of laboratory tests and field experience.

A policy of ongoing product improvement is maintained. This may result in modifications of features and/or specifications without notice.

