



## Duraflo® WeatherPRO® Ridge Vent

The Duraflo® WeatherPRO® Ridge Airfoil designed edge allows smooth airflow over the ridgeline maximizing effective ventilation from the attic space while deflecting blowing debris. Internal baffles and drainage openings easily deflect and direct away extreme weather.

Install along the ridge of a sloped, shingled roof to ventilate hot, moist attic air as a part of a balanced ventilation system. The rigid plastic, solid 4 foot vent can then be shingled over with cap shingles.

### PRO Ridge Vent (12/ctn)

Description	Imperial Part Number	Metric Part Number
Black	6073BL	6072METBL
Brown	6073BR	6072METBR
Weatherwood	6073WW	6072METWW

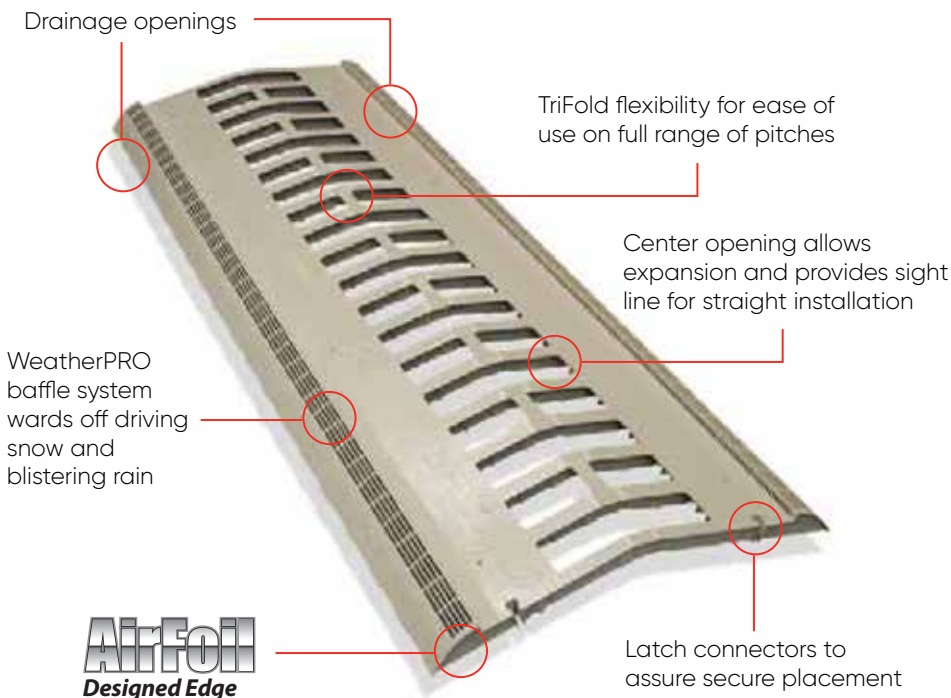

### Features:


- Engineered with AirFoil Technology – to maximize air lift
- Suitable for roof pitches 3/12 to 12/12
- 18.3 sq. in. of net free area per linear ft.
- Four pieces of PRO Ridge vent will ventilate approximately 1000 sq ft of attic space
- Patented internal weather infiltration protection baffle system
- Latch connectors on each end, built-in end caps every 3 in
- Cold impact resistant to -40°C
- Code regulated insect grill
- Hand nail only
- Injection molded from pure, high grade polypropylene with premium UV inhibitor additives
- Available for use with either Metric or Imperial size shingles

### Standards:




CSA certified – Plastic Type C ridge vent, for installation on roof ridge

Miami Dade High Velocity Hurricane Zone certified: NOA 05-0516.06

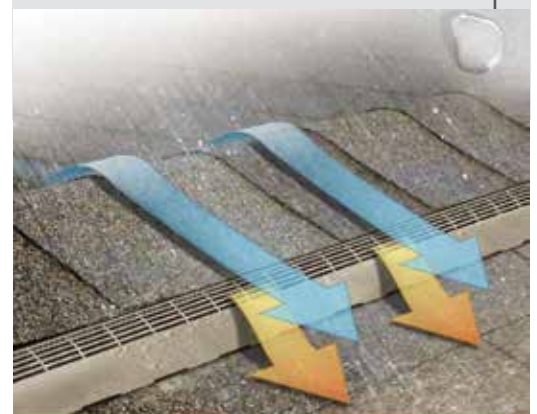


Patent 8,069,621

## AirFoil Technology

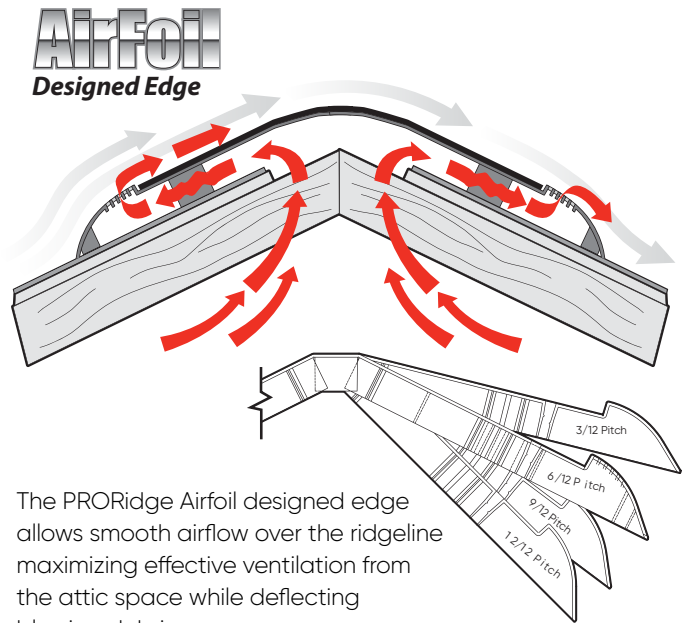


Shingles install into recessed top, allowing cleaner installation appearance while maximizing airflow over ridge.

Internal baffles and drainage openings easily deflect and direct away extreme weather

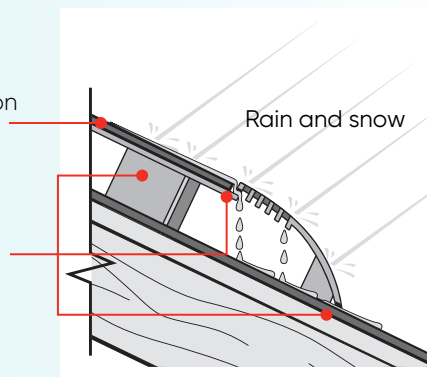

WeatherPRO's patented internal baffles deflect water and snow, allowing it to drain harmlessly out the drainage openings. Designed to allow high airflow while providing excellent defense against weather infiltration.

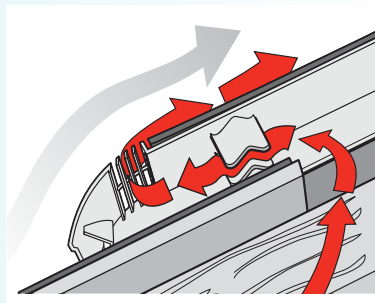

## Contact us

Visit our website: [ipexna.com](http://ipexna.com) /  
[sales@ipexamerica.com](mailto:sales@ipexamerica.com)

Eastern U.S. Toll free: (800) 463-9572  
Western U.S. Toll free: (888) 461-5307

Duraflor® is a registered trademark.